



Product: E1.3 - 4C18X3E-5K HLO-T (high lumen output) for tunnelling applications

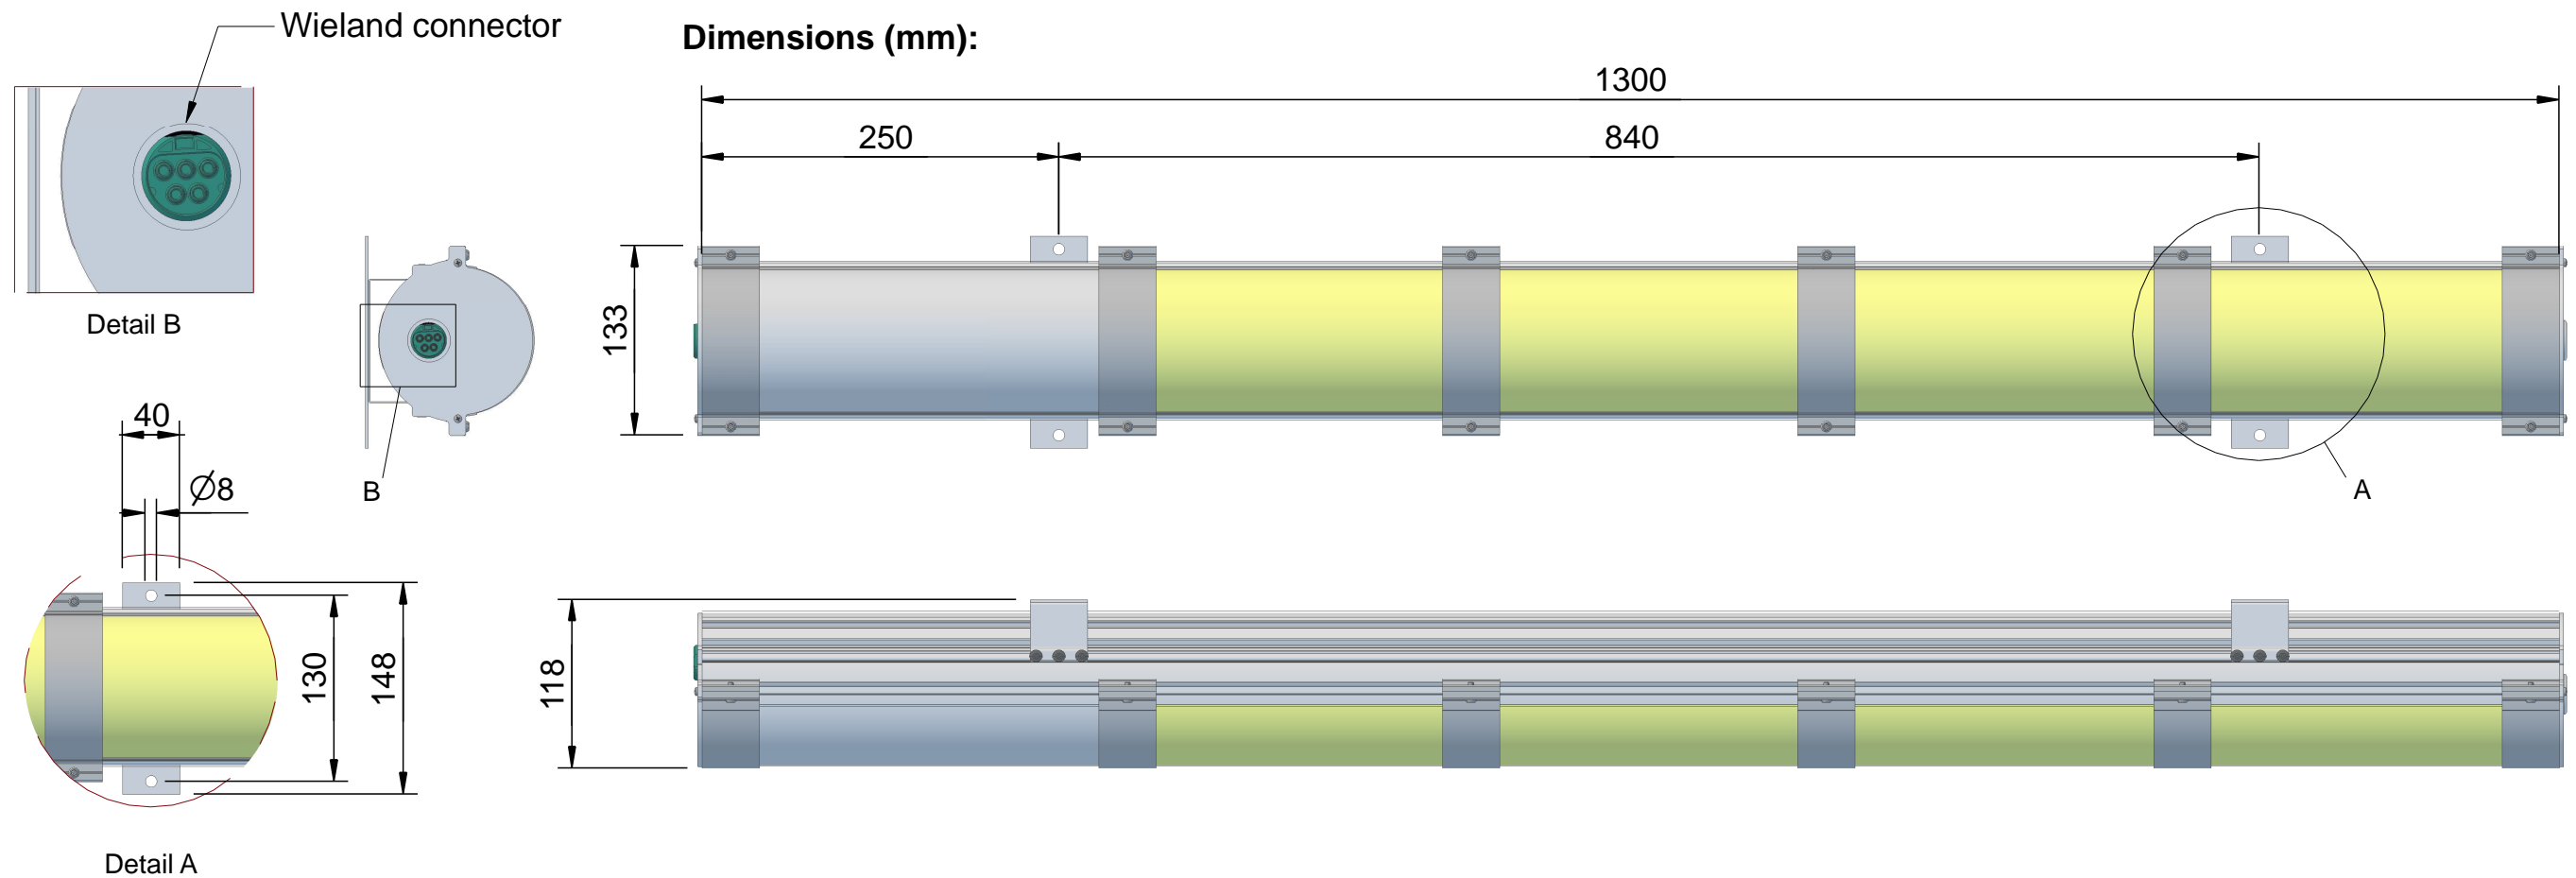

Specifications:

Input voltage	Vac	120-270
Frequency	Hz	50/60
Rated Power	Watt	162 (maximum)
Dimming signal		DALI
Dimming range		10 -100%
Shock resistance		IK 10+
Insulation class		class II
Dust/waterresistance		IP 66
LED type		NICHIA (high power ceramic led)
Ambient temperature	°C	-40°C/ +50°C
Color temperature	K	5000 (standard)
All wires		LSZH (low smoke zero halogen)
Connector		Wieland RST 96 051 5053 6
Luminous flux	lm	11929
Weight	Kg	8

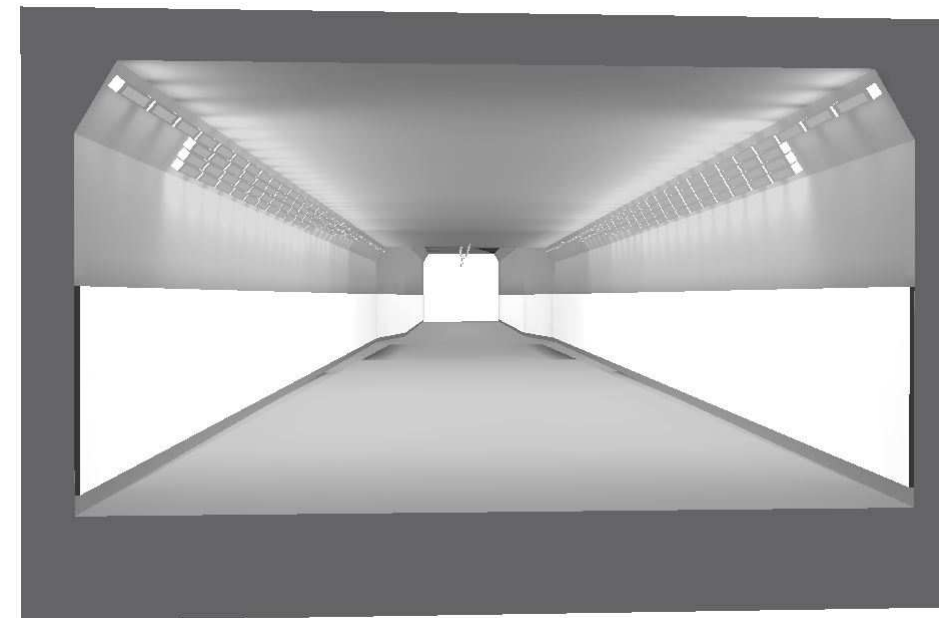

Tunnel entrance zone situation (Dialux picture)