


Name: **Light + Building**

Year: **2024**

Company: Civic s.r.l.




PRODUTTORI MANUFACTURI VENDITORI SEL CONSULENTI C WE ARE CIVIC MULTILANGUA PROFESSIONIST PROFESSIONAI

ERS ARTIGIANI LERS CONSULTANTS MULTILINGUA GE

LS



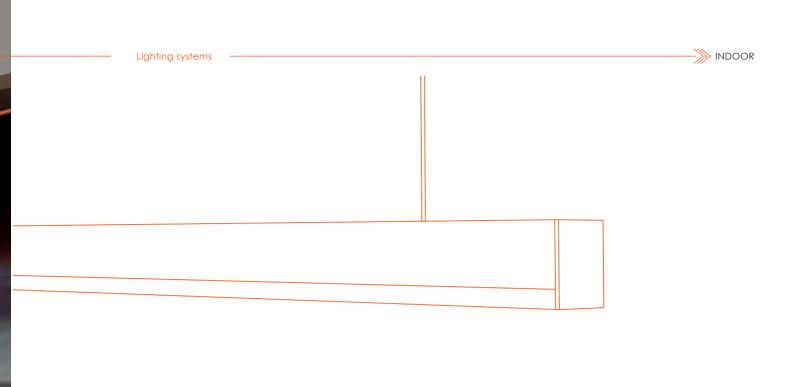





Ceiling or suspended fitting for indoor use. Structure made of powder coated extruded aluminium. Opal polycarbonate diffuser. Powder coated aluminium end caps. Equipped with LEDs in 5500K/4000K/3000K white colour. Driver included. IK08. CRI 90. Lifetime: 50000h, L80 B10. Minimum colour tolerance: 3MacAdam (3SDCM).

C€	IP20
LED	RG0
CRI 90	Mac Adam 3
L80 B10	Ŧ
50000H	



STILO

Z. COLOR white - 02







4000K











CODICE/CODE	L.mm	W	LM
TNR.3102. 0 6 Y. 02	850	21W/230V	2930lm/2860lm/2700lm
TNR.3103. 0 6 Y. 02	1130	28W/230V	3920lm/3820lm/3620lm
TNR.3104. 0 6 Y. 02	1410	35W/230V	4910lm/4780lm/4540lm

ACCESSORI / ACCESSORIES




TNR.SOSuspension kit (pair).

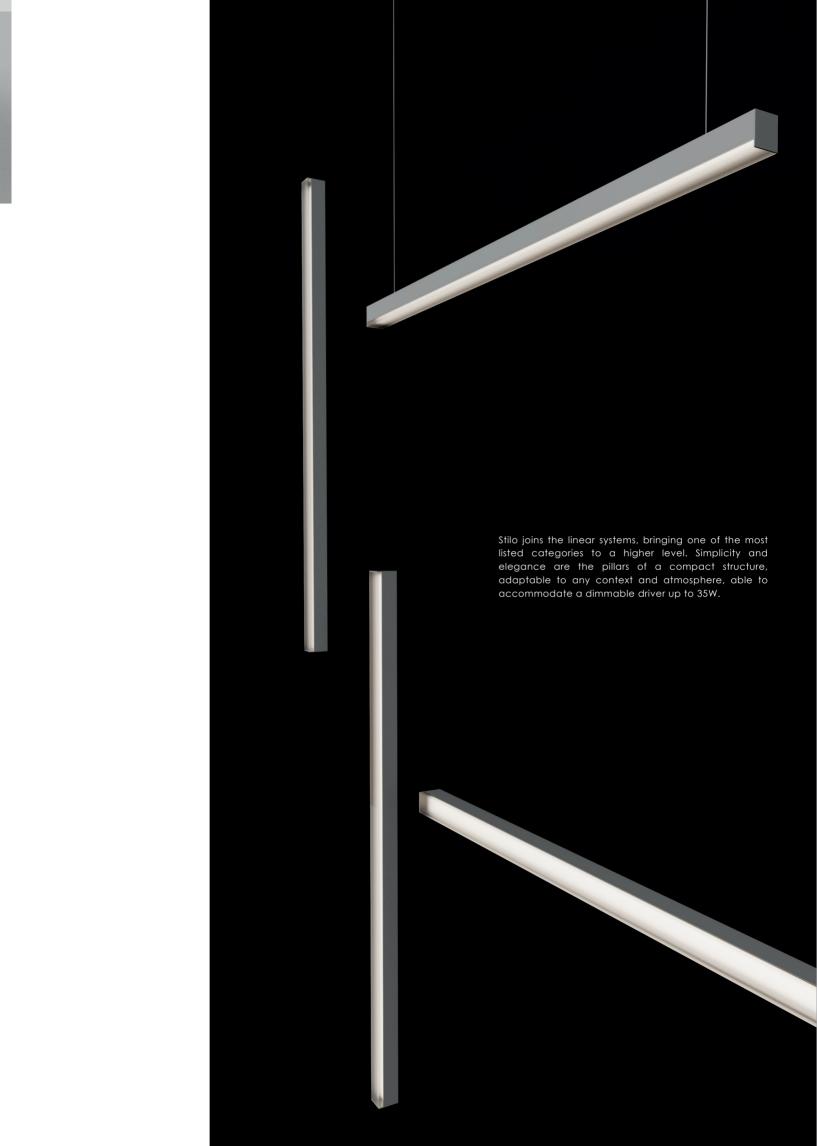

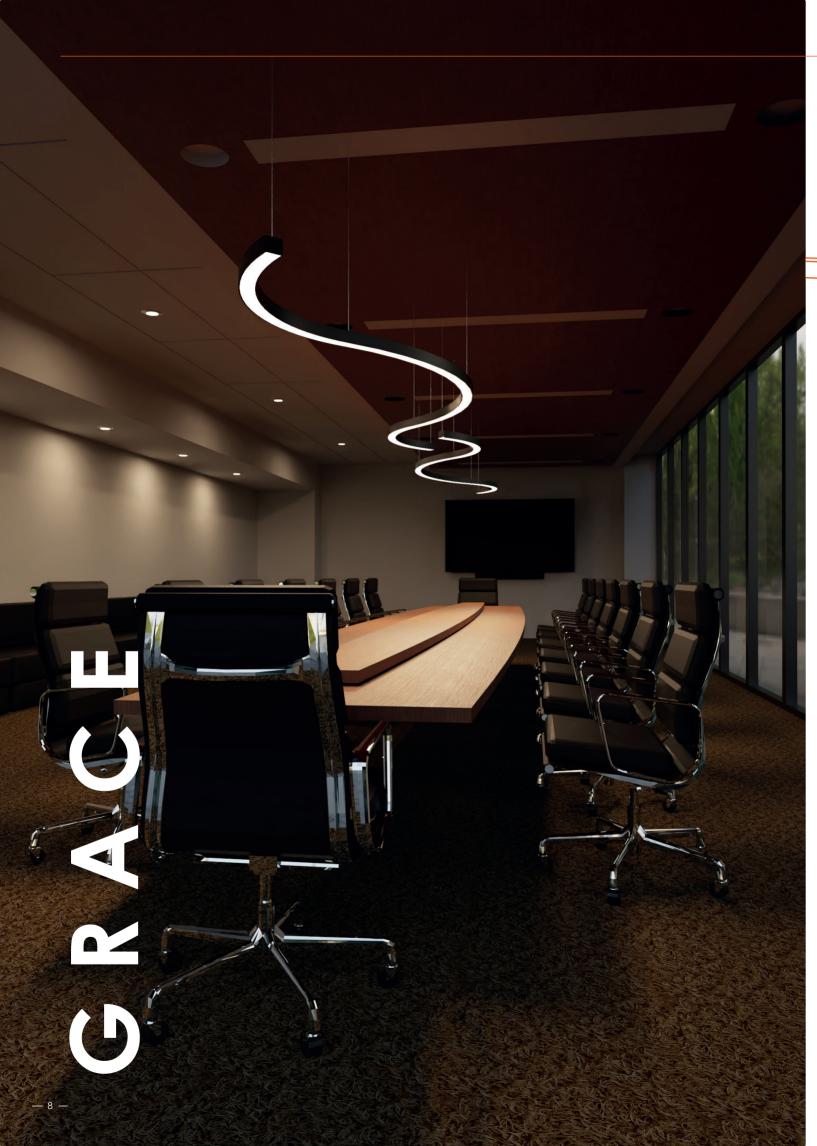





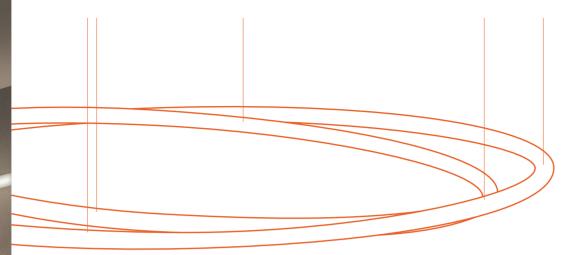

UROBORO






Tubular profile for interiors with a continuous lighting effect and a clean minimal design. Ring light for ceiling or suspended installation. Opal diffuser. Dimmable versions are available on request.


BOA




Tubular profile for interiors with a continuous lighting effect and a clean minimal design. Curved tubular profile for wall installation. Opal diffuser. Dimmable versions are available on request.



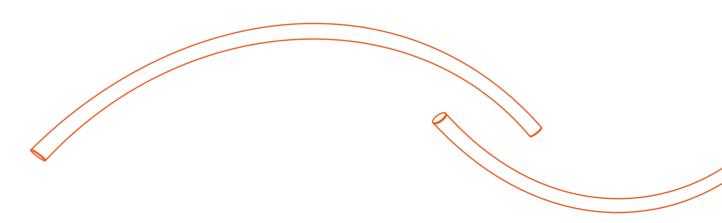

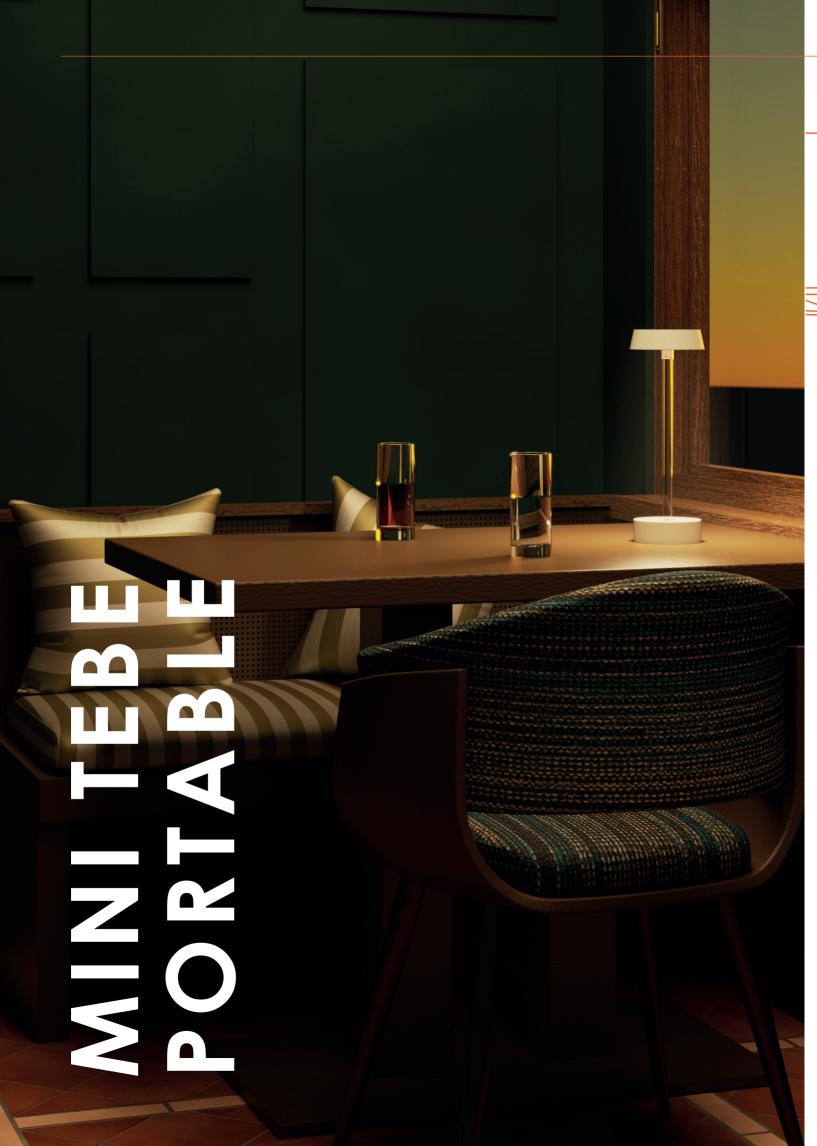




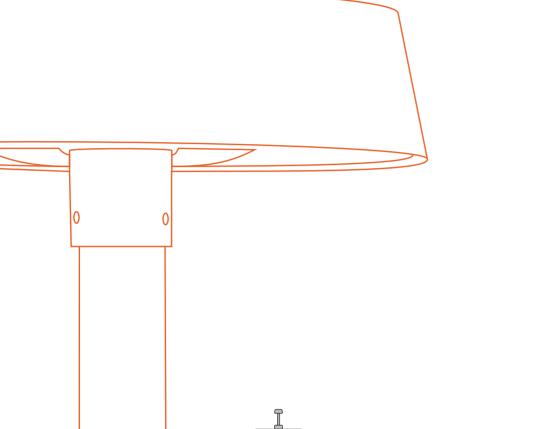





The Tebe family also extends to interior spaces with a new component, designed to evenly illuminate surfaces such as tables and desks. Stainless steel head with polyester powder coating. Polycarbonate stem. Opal polycarbonate screen. Silicone rubber seal. Equipped with LED 4000K, 3000K or 2700K. Power 5W. Available in two solutions, 230V or 24V. IP65 degree of protection. RG0 photobiological hazard. H05RN-F connection cable. Battery Powered.





















APOLLO XS

Luminaire suitable for different environments, from domestic to large architectural spaces, ideal for lighting outdoor walls and paths. Body and closing frame in die-cast painted aluminum. Glass diffuser. Rubber seal. Driver included.













