


## SNEP<sup>®</sup> MODE P - Environment prioritised

SNEP<sup>®</sup> MODE P is a sturdy aluminium-framed IP65-class general light designed for low spaces.

The robust SNEP<sup>®</sup> MODE P, thanks to its wide light distribution, is a natural choice for lighting in parking garages, production facilities, and warehouses. The high IP65 enclosure class and wide operating temperature and luminous flux range allow installation in a variety of locations. The luminaire is available in three lengths and several connection method and mounting options. The product is quick and easy to install.

## Product info


IP-class	IP65 / IP20 depending on the configuration
Mechanical impact resistance	IK08 / IK07
Protection class	I
Ambient temperature	Ta -25...+40°C / -40...+50°C depending on the selected power and electronic control gear versions
Voltage	200-240 Vac
Power Factor	>0.95
Frequency	0/50/60 Hz
Frame Structure	Frame recycled Purso Greenline aluminium profile, end caps durable and V0-classified flame retardant PC-plastics
Colour	Powder coated white (RAL9010) or Anodized grey
Optical cover / Optics	Prismatic PC-cover
CRI / CCT	<ul style="list-style-type: none"><li>3000K CRI &gt; 80, MacAdam 3 SDCM</li><li>4000K CRI &gt; 80, MacAdam 3 SDCM</li><li>5000K CRI &gt; 80, MacAdam 3 SDCM</li><li>3000K CRI &gt; 90, MacAdam 3 SDCM</li><li>4000K CRI &gt; 90, MacAdam 3 SDCM</li><li>5000K CRI &gt; 90, MacAdam 3 SDCM</li><li>2700-6500K CRI &gt; 80, tunable white, MacAdam 3 SDCM</li><li>2700-6500K CRI &gt; 90, tunable white, MacAdam 3 SDCM</li></ul>
Control	<ul style="list-style-type: none"><li>On/Off</li><li>DALI</li><li>Industrial ON/OFF</li><li>Industrial DALI</li><li>Configurable motion radar. Default setting 10min 100% lights from motion, 10min 30% after which 0% light. Corridor function possibility.</li><li>ActiveAhead IP65 Low Bay PIR and daylight.</li><li>ActiveAhead control. Requires an AA-sensor or switch to the network!</li><li>Casambi control</li><li>Philips MasterConnect Low Bay PIR and daylight sensor, SNS212MC, IP20</li><li>Philips MasterConnect control, SN412MC, IP20</li><li>Luminaire integrated DALI-system sensor. IP65 Low Bay PIR and daylight.</li><li>DALI Tunable White DT8</li><li>Casambi tunable white control</li></ul>
Installation method	With SNEP® MODE-brackets
Lumen maintenance	L80B50>100 000h, L80B10>90 000h, L90B50>50 000h
Failure rate	100 000h / 10 %
Warranty	5-years.
Length	A 580 mm / 1140 mm/ 1420 mm, B 80 mm, C 85 mm, D=A+85 mm, E=A+85+85mm

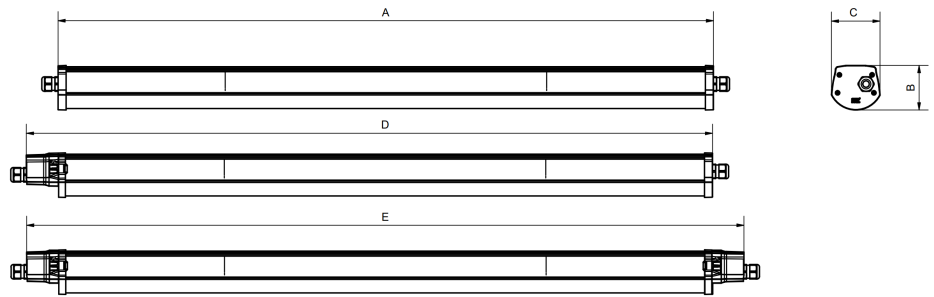







## Classifications



## Optics

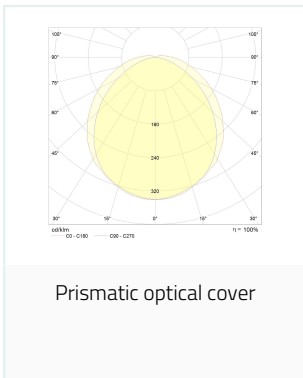

## Connections

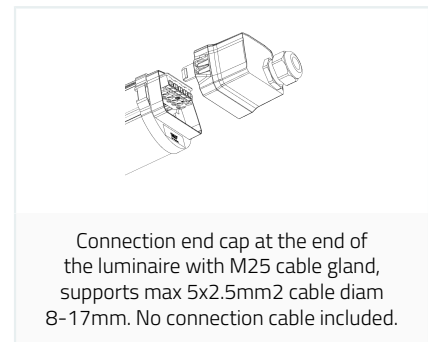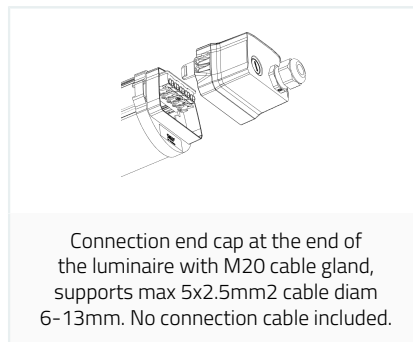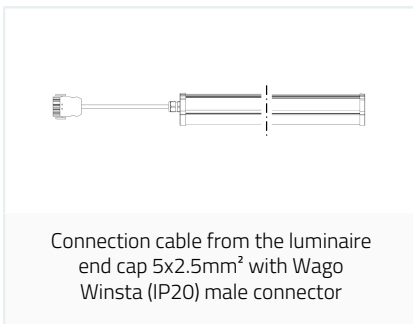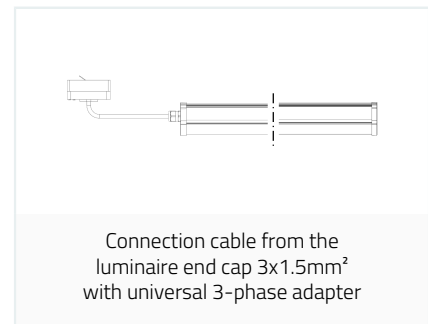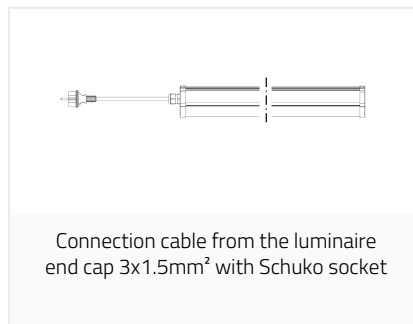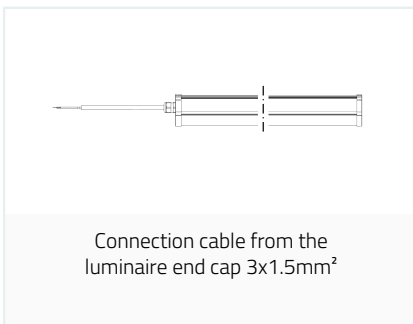



Through cabling with  
5x2.5mm<sup>2</sup> connection cables




Through cabling with 5x2.5mm<sup>2</sup>  
Wago Winsta connection cables.  
Female cable always 2m long and  
the male cable length from 1 to 8m.




Through cabling with 5x2.5mm<sup>2</sup> Wago  
Winsta connection cables from the same  
end cap. Female cable always 2m long  
and the male cable length from 1 to 8m.




Through cabling from the same end  
cap with 5x2.5mm<sup>2</sup> connection cables




Through cabling through the connection  
end caps with M20 cable glands,  
supports max 5x2.5mm<sup>2</sup> cable diam  
6-13mm. No connection cables included.




Through cabling through the connection  
end caps with M25 cable glands,  
supports max 5x2.5mm<sup>2</sup> cable diam  
8-17mm. No connection cables included.




Through cabling with connection end cap  
on the one end and 5x2.5mm<sup>2</sup> connection  
cable at the other of the luminaire.



Through cabling through the connection  
end caps with M20 cable glands  
from the same end cap, supports  
max 5x2.5mm<sup>2</sup> cable diam 6-13mm.  
No connection cables included.



Through cabling through the connection  
end caps with M25 cable glands  
from the same end cap, supports  
max 5x2.5mm<sup>2</sup> cable diam 8-17mm.  
No connection cables included.



Through cabling through the connection  
end caps with terminal blocks supporting  
7-pole max 7x2.5mm<sup>2</sup> cabling. No  
connection cables included. Cable glands  
M25 and M20, supporting cables diam  
8-17mm and 6-13mm respectively.

# Luminaires

Luminaires	CRI	CCT	Optics	Length	Width	Height	Weight
SNEP® MODE P	CRI > 80	4000K	P0M	580mm	85mm	80mm	1.5kg

Nimike	Technical name	lm**	W**	lm/W**	Ta	Taind	Lifetime	Failure rate
P02 P0M	840LE 10W	1500	10	150	-25...+45°C	-40...+55°C	L80B50 = 100 000h	100 000h / 10%
P02 P0M	840LE 14W	1950	14	139	-25...+45°C	-40...+50°C	L80B50 = 100 000h	100 000h / 10%
P02 P0M	840LE 17W	2400	17	141	-25...+40°C	-40...+45°C	L80B50 = 100 000h	100 000h / 10%
P02 P0M	840LE 20W	2850	20	143	-25...+40°C	-40...+45°C	L80B50 = 100 000h	100 000h / 10%
P02 P0M	840LE 23W	3250	23	141	-25...+40°C	-40...+45°C	L80B50 = 100 000h	100 000h / 10%
P02 P0M	840HE 22W	3400	22	155	-25...+40°C	-40...+45°C	L80B50 = 100 000h	100 000h / 10%
P02 P0M	840HE 27W	4100	27	152	-25...+40°C	-40...+40°C	L80B50 = 100 000h	100 000h / 10%
P02 P0M	840HO 34W	4950	34	146	-25...+35°C	-40...+40°C	L80B50 = 100 000h	100 000h / 10%
P02 P0M	840HO 39W	5600	39	144	-25...+35°C	-40...+35°C	L80B50 = 100 000h	100 000h / 10%
P02 P0M	840HO 42W	6050	42	144	-25...+35°C	-40...+35°C	L80B50 = 100 000h	100 000h / 10%
P02 P0M	840HO 46W	6450	46	140	-25...+35°C	-40...+35°C	L80B50 = 100 000h	100 000h / 10%

Luminaires	CRI	CCT	Optics	Length	Width	Height	Weight
SNEP® MODE P	CRI > 80	4000K	P0M	1140mm	85mm	80mm	2.5kg

Nimike	Technical name	lm**	W**	lm/W**	Ta	Taind	Lifetime	Failure rate
P04 P0M	840LE 16W	2400	16	150	-25...+45°C	-40...+55°C	L80B50 = 100 000h	100 000h / 10%
P04 P0M	840LE 19W	2950	19	155	-25...+45°C	-40...+55°C	L80B50 = 100 000h	100 000h / 10%
P04 P0M	840LE 25W	3900	25	156	-25...+45°C	-40...+50°C	L80B50 = 100 000h	100 000h / 10%
P04 P0M	840LE 32W	4800	32	150	-25...+40°C	-40...+45°C	L80B50 = 100 000h	100 000h / 10%
P04 P0M	840LE 38W	5650	38	149	-25...+40°C	-40...+45°C	L80B50 = 100 000h	100 000h / 10%
P04 P0M	840LO 45W	6500	45	144	-25...+40°C	-40...+45°C	L80B50 = 100 000h	100 000h / 10%
P04 P0M	840HE 43W	6800	43	158	-25...+40°C	-40...+45°C	L80B50 = 100 000h	100 000h / 10%
P04 P0M	840HE 53W	8150	53	154	-25...+40°C	-40...+40°C	L80B50 = 100 000h	100 000h / 10%
P04 P0M	840HE 66W	9950	66	151	-25...+35°C	-40...+40°C	L80B50 = 100 000h	100 000h / 10%
P04 P0M	840HO1 76W	11250	76	148	-25...+35°C	-40...+35°C	L80B50 = 100 000h	100 000h / 10%
P04 P0M	840HO1 82W	12100	82	148	-25...+35°C	-40...+35°C	L80B50 = 100 000h	100 000h / 10%
P04 P0M	840HO2 89W	12950	89	146	-25...+35°C	-40...+35°C	L80B50 = 100 000h	100 000h / 10%

Luminaires	CRI	CCT	Optics	Length	Width	Height	Weight
SNEP® MODE P	CRI > 80	4000K	P0M	1420mm	85mm	80mm	3.1kg

Nimike	Technical name	lm**	W**	lm/W**	Ta	Taind	Lifetime	Failure rate
P05 P0M	840LE 20W	3100	20	155	-25...+45°C	-40...+55°C	L80B50 = 100 000h	100 000h / 10%
P05 P0M	840LE 24W	3800	24	158	-25...+45°C	-40...+55°C	L80B50 = 100 000h	100 000h / 10%
P05 P0M	840LE 32W	5000	32	156	-25...+45°C	-40...+50°C	L80B50 = 100 000h	100 000h / 10%
P05 P0M	840LE 41W	6150	41	150	-25...+40°C	-40...+45°C	L80B50 = 100 000h	100 000h / 10%
P05 P0M	840LO 49W	7300	49	149	-25...+40°C	-40...+45°C	L80B50 = 100 000h	100 000h / 10%
P05 P0M	840LO 58W	8400	58	145	-25...+40°C	-40...+45°C	L80B50 = 100 000h	100 000h / 10%
P05 P0M	840HE 55W	8750	55	159	-25...+40°C	-40...+45°C	L80B50 = 100 000h	100 000h / 10%
P05 P0M	840HE 67W	10500	67	157	-25...+40°C	-40...+40°C	L80B50 = 100 000h	100 000h / 10%
P05 P0M	840HO 84W	12800	84	152	-25...+35°C	-40...+40°C	L80B50 = 100 000h	100 000h / 10%
P05 P0M	840HO 96W	14450	96	151	-25...+35°C	-40...+35°C	L80B50 = 100 000h	100 000h / 10%
P05 P0M	840HO 105W	15550	105	148	-25...+35°C	-40...+35°C	L80B50 = 100 000h	100 000h / 10%
P05 P0M	840HO 113W	16650	113	147	-25...+35°C	-40...+35°C	L80B50 = 100 000h	100 000h / 10%

Luminaires	CRI	CCT	Optics	Length	Width	Height	Weight
SNEP® MODE P	CRI > 80	2700-6500K	P0M	1420mm	85mm	80mm	3.2kg

Nimike	Technical name	lm**	W**	lm/W**	Ta	Taind	Lifetime	Failure rate
P05 P0M	8TWHE 49W	6750	49	138	-25...+40°C	NA	L80B50 = 100 000h	100 000h / 10%
P05 P0M	8TWHE 58W	8000	58	138	-25...+40°C	NA	L80B50 = 100 000h	100 000h / 10%
P05 P0M	8TWHE 68W	9250	68	136	-25...+40°C	NA	L80B50 = 100 000h	100 000h / 10%
P05 P0M	8TWHE 78W	10500	78	135	-25...+35°C	NA	L80B50 = 100 000h	100 000h / 10%
P05 P0M	8TWHO 88W	11700	88	133	-25...+35°C	NA	L80B50 = 100 000h	100 000h / 10%
P05 P0M	8TWHO 98W	12900	98	132	-25...+35°C	NA	L80B50 = 100 000h	100 000h / 10%

Luminaires	CRI	CCT	Optics	Length	Width	Height	Weight
SNEP® MODE P	CRI > 90	2700-6500K	P0M	1420mm	85mm	80mm	3.2kg

Nimike	Technical name	lm**	W**	lm/W**	Ta	Taind	Lifetime	Failure rate
P05 P0M	9TWHE 49W	6050	49	123	-25...+35°C	NA	L80B50 = 100 000h	100 000h / 10%
P05 P0M	9TWHE 58W	7200	58	124	-25...+35°C	NA	L80B50 = 100 000h	100 000h / 10%
P05 P0M	9TWHE 68W	8300	68	122	-25...+35°C	NA	L80B50 = 100 000h	100 000h / 10%

P05 P0M	9TWHE 78W	9400	78	121	-25...+35°C	NA	L80B50 = 100 000h	100 000h / 10%
P05 P0M	9TWHO 88W	10500	88	119	-25...+30°C	NA	L80B50 = 100 000h	100 000h / 10%
P05 P0M	9TWHO 98W	11550	98	118	-25...+30°C	NA	L80B50 = 100 000h	100 000h / 10%

\*Values are given in normal ambient temperature +25°C  
 For non condensing environment or use  
 Cabling length tolerance from the luminaire ends +0...-10%  
 Input power tolerance is ±5% and light output tolerance is ±7%